

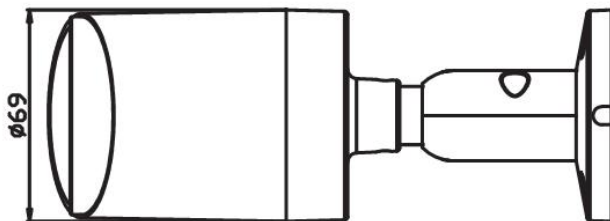



Model: lcs-mini-bullet-5mp

5MP ColorVu Bullet IP Camera

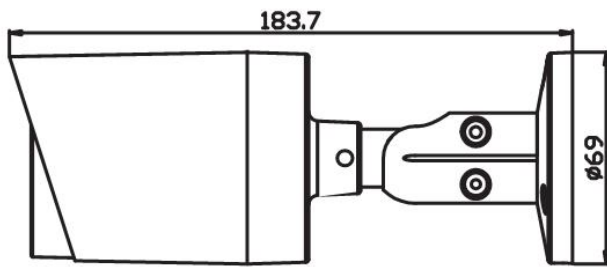

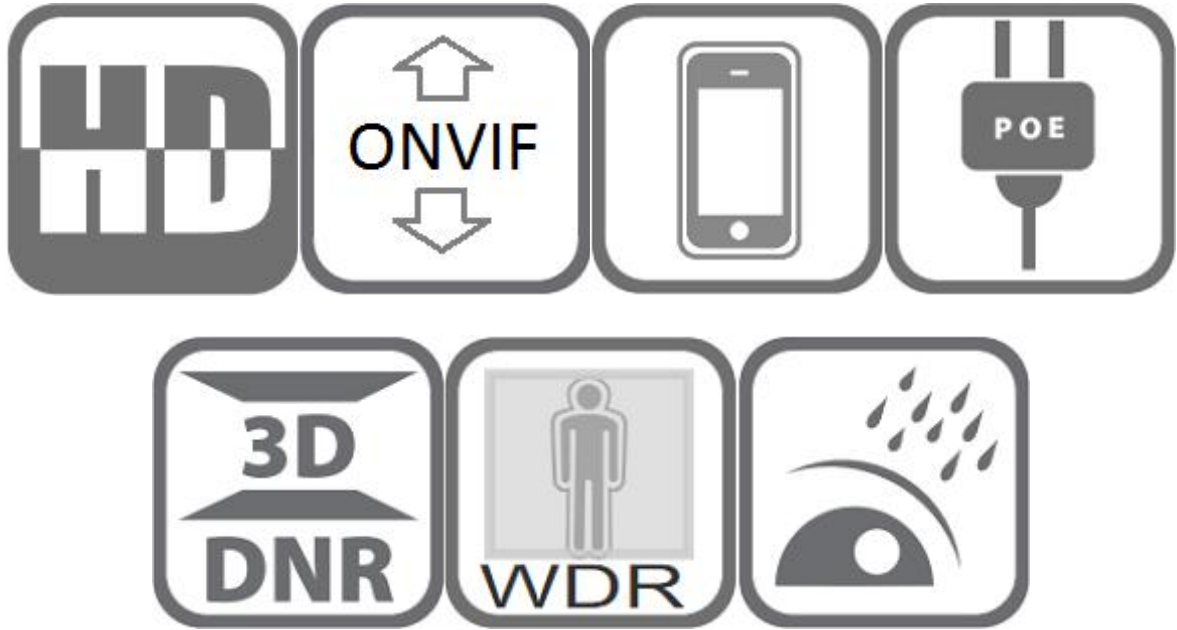

Features:

- ❖ 1/2.8" Sony IMX335 CMOS sensor
- ❖ Full HD resolution 2592 x 1944P
- ❖ Ultra low illumination 0.001Lux
- ❖ Day/Night (ICR), AWB, AGC, BLC, 2D/3D-DNR, IR-CUT
- ❖ D-WDR, Motion Detection, Privacy Mask, Mirror
- ❖ RTSP and Onvif 11.07 compatible
- ❖ H.265/H.264 dual-stream media server
- ❖ Easy-to-use P2P Cloud service
- ❖ Multi web browser, PC Client, mobile APP remote access
- ❖ **Audio/Alarm/SD card slot optional**
- ❖ Lightning protection 4000V
- ❖ Strong water-proof housing, IP67
- ❖ 2PCS Soft & Warm Supplemental Light,Light distance:25-30M ❖ HD 2.8mm F1.0 true starlight lens

Technical Specifications:

Model	lcs-mini-bullet-5mp
Camera	
Image Sensor	1/2.8" SONY IMX335 CMOS
Effective Pixels	2592 (H) × 1944 (V)
Electronic Shutter	AUTO, 1/25s ~ 1/100000s

Min. Illumination	0.001Lux@F1.2(AGC ON), 0Lux IR on
Day/Night	Auto/Color/(B/W)/Timing
WDR	Digital WDR
White Balance	Auto/Indoor/Outdoor
BLC	Support
DNR	2D/3D DNR
Other	Motion Detection, Privacy Mask, Mirror, flip
Encode	
Embedded Solution	SSC337DE
Video Standard	H.264/H.265
Video Resolution	Main Stream:25fps@ 5MP(2592*1944) , 25fps@ 4MP(2592*1520) Sub Stream: VGA(640x480)/360P@20fps, etc.
Video Bitrates	32Kbps - 6Mbps, VBR/CBR
Audio Standard	G.711-u/G.711-a
OSD Overlay	Title and Time overlay
Leds	
Leds	2PCS Soft & Warm Supplemental Light
Light Distance	25-30 M
Lens	
Focal length	HD 2.8mm F1.0 true starlight lens
Optional Functions	
Audio/Alarm/SD card slot (support maximum 256GB SD card)	
Network Services	
Protocol	HTTP/RTSP/FTP/NFS/SMTP/DHCP/NTP, etc.
P2P	Yes
Web	IE , Firefox, etc.
Media	CMS, Android, IOS
ONVIF	2.6 compatible
General	
Network Port	1-RJ45, 100Mbps,
Power Supply	POE ,12 VDC ± 10%
Power Consumption	< 8 W
Operating Temp.	-30°C -(+60)°C, 10%-90%RH

securitycams.ch gmbh

Grabenstr. 14 CH-6340 Baar +41 (0)41 763 23 19